

Zehnder Forma Asym

Centrale verwarming


Productinformatie

always the best climate



Voordelen

Modeloverzicht

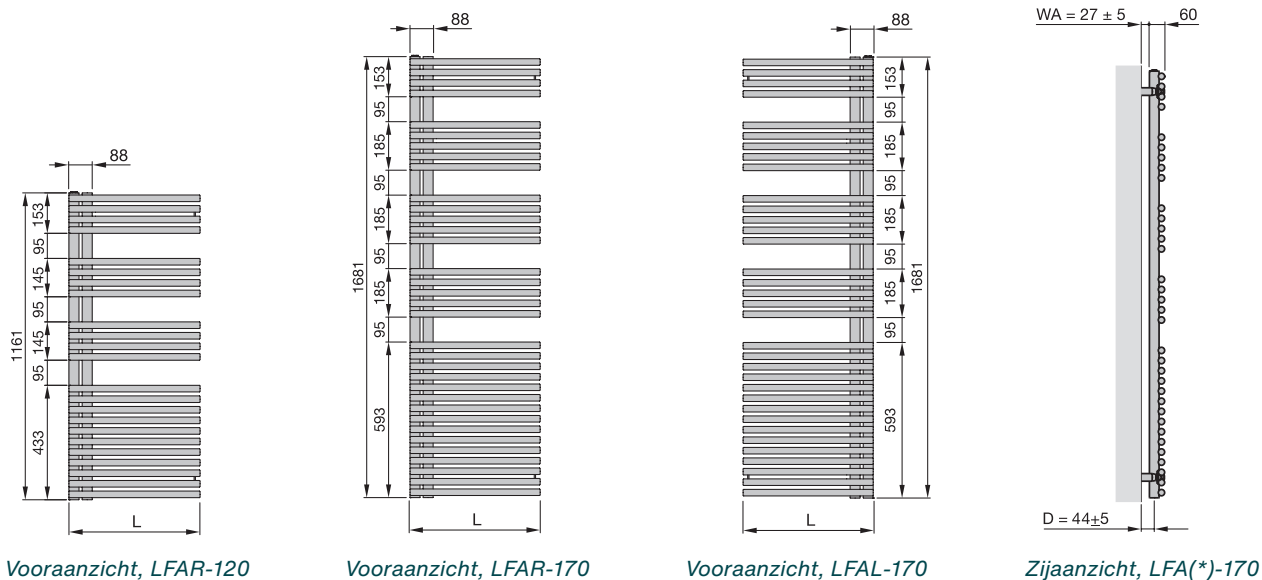

Gelakte versie

Model	H	L	Vermogens				
			75/65/20 °C	70/55/24 °C	70/55/20 °C	55/45/24 °C	55/45/20 °C
	mm	mm	Watt	Watt	Watt	Watt	Watt
Uitvoering rechts							
LFAR-120-050	1161	496	547	389	446	237	285
LFAR-150-050	1441	496	672	475	546	288	347
LFAR-170-050	1681	496	778	552	633	335	404
LFAR-120-060	1161	596	628	446	512	272	327
LFAR-150-060	1441	596	772	544	626	328	396
LFAR-170-060	1681	596	894	634	727	385	464
Uitvoering links							
LFAL-120-050	1161	496	547	389	446	237	285
LFAL-150-050	1441	496	672	475	546	288	347
LFAL-170-050	1681	496	778	552	633	335	404
LFAL-120-060	1161	596	628	446	512	272	327
LFAL-150-060	1441	596	772	544	626	328	396
LFAL-170-060	1681	596	894	634	727	385	464

H = bouwhoogte, L = bouwlengte

75/65/20 = genormeerd warmtevermogen volgens EN 442

Gelakte versie

Met middenaansluiting 50 mm

Model	H	L	Vermogens				
			75/65/20 °C	70/55/24 °C	70/55/20 °C	55/45/24 °C	55/45/20 °C
	mm	mm	Watt	Watt	Watt	Watt	Watt
Uitvoering rechts							
LFAR-120-050-05	1161	496	547	389	446	237	285
LFAR-150-050-05	1441	496	672	475	546	288	347
LFAR-170-050-05	1681	496	778	552	633	335	404
LFAR-120-060-05	1161	596	628	446	512	272	327
LFAR-150-060-05	1681	596	772	544	727	328	396
LFAR-170-060-05	1441	596	894	634	626	385	464
Uitvoering links							
LFAL-120-050-05	1161	469	547	389	446	237	285
LFAL-150-050-05	1441	496	672	475	546	288	347
LFAL-170-050-05	1681	469	778	552	633	335	404
LFAL-120-060-05	1161	596	628	446	512	272	327
LFAL-150-060-05	1681	596	772	544	727	328	396
LFAL-170-060-05	1441	596	894	634	626	385	464

*H = bouwhoogte, L = bouwlengte**75/65/20 = genormeerd warmtevermogen volgens EN 442***Productdetails**

Detail zijdelingse aansluiting, kraanwerk in optie