

# Zehnder Forma Asym

Chauffage central


Fiche technique

always the best climate



Avantages

Vue d'ensemble du modèles

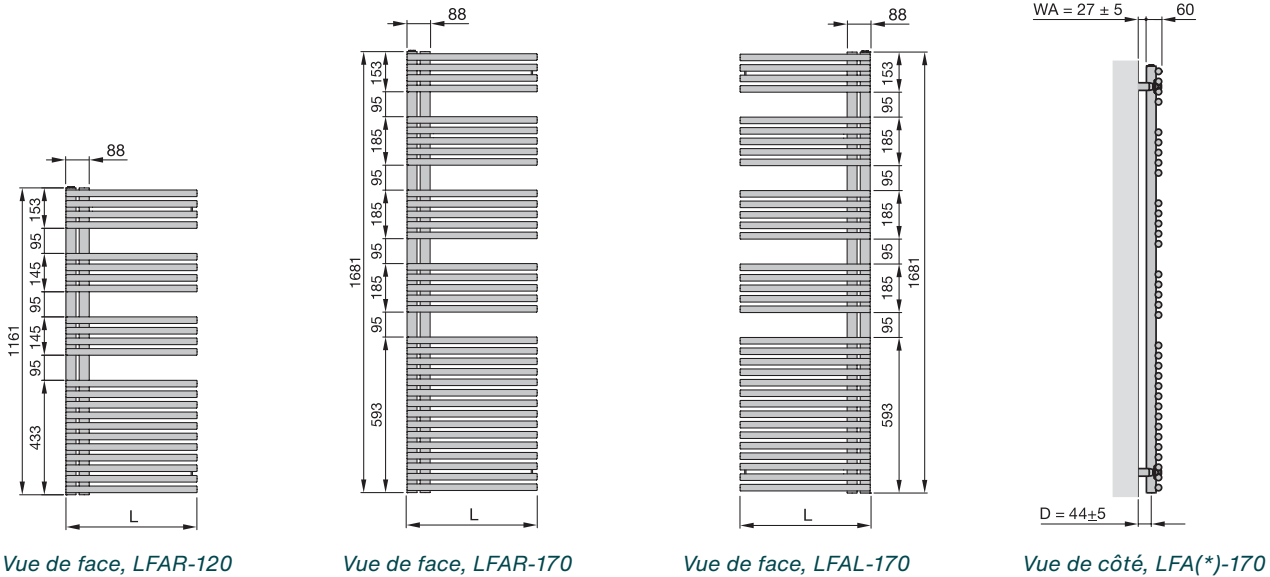

Version laquée

| Modèle         | H    | L   | Puissance thermique |                     |                     |                     |                     |
|----------------|------|-----|---------------------|---------------------|---------------------|---------------------|---------------------|
|                | mm   | mm  | 75/65/20 °C<br>Watt | 70/55/24 °C<br>Watt | 70/55/20 °C<br>Watt | 55/45/24 °C<br>Watt | 55/45/20 °C<br>Watt |
|                |      |     |                     |                     |                     |                     |                     |
| Version droite |      |     |                     |                     |                     |                     |                     |
|                |      |     |                     |                     |                     |                     |                     |
| LFAR-120-050   | 1161 | 496 | 547                 | 389                 | 446                 | 237                 | 285                 |
| LFAR-150-050   | 1441 | 496 | 672                 | 475                 | 546                 | 288                 | 347                 |
| LFAR-170-050   | 1681 | 496 | 778                 | 552                 | 633                 | 335                 | 404                 |
| LFAR-120-060   | 1161 | 596 | 628                 | 446                 | 512                 | 272                 | 327                 |
| LFAR-150-060   | 1441 | 596 | 772                 | 544                 | 626                 | 328                 | 396                 |
| LFAR-170-060   | 1681 | 596 | 894                 | 634                 | 727                 | 385                 | 464                 |
|                |      |     |                     |                     |                     |                     |                     |
| Version gauche |      |     |                     |                     |                     |                     |                     |
|                |      |     |                     |                     |                     |                     |                     |
| LFAL-120-050   | 1161 | 496 | 547                 | 389                 | 446                 | 237                 | 285                 |
| LFAL-150-050   | 1441 | 496 | 672                 | 475                 | 546                 | 288                 | 347                 |
| LFAL-170-050   | 1681 | 496 | 778                 | 552                 | 633                 | 335                 | 404                 |
| LFAL-120-060   | 1161 | 596 | 628                 | 446                 | 512                 | 272                 | 327                 |
| LFAL-150-060   | 1441 | 596 | 772                 | 544                 | 626                 | 328                 | 396                 |
| LFAL-170-060   | 1681 | 596 | 894                 | 634                 | 727                 | 385                 | 464                 |

H = hauteur, L = longueur  
75/65/20 = puissance thermique normalisée conformément à EN 442

## Version laquée

## Raccordement central 50 mm

| Modèle          | H    | L   | Puissance thermique |             |             |             |             |
|-----------------|------|-----|---------------------|-------------|-------------|-------------|-------------|
|                 |      |     | 75/65/20 °C         | 70/55/24 °C | 70/55/20 °C | 55/45/24 °C | 55/45/20 °C |
|                 | mm   | mm  | Watt                | Watt        | Watt        | Watt        | Watt        |
|                 |      |     |                     |             |             |             |             |
| Version droite  |      |     |                     |             |             |             |             |
|                 |      |     |                     |             |             |             |             |
| LFAR-120-050-05 | 1161 | 496 | 547                 | 389         | 446         | 237         | 285         |
| LFAR-150-050-05 | 1441 | 496 | 672                 | 475         | 546         | 288         | 347         |
| LFAR-170-050-05 | 1681 | 496 | 778                 | 552         | 633         | 335         | 404         |
| LFAR-120-060-05 | 1161 | 596 | 628                 | 446         | 512         | 272         | 327         |
| LFAR-150-060-05 | 1681 | 596 | 772                 | 544         | 727         | 328         | 396         |
| LFAR-170-060-05 | 1441 | 596 | 894                 | 634         | 626         | 385         | 464         |
|                 |      |     |                     |             |             |             |             |
| Version gauche  |      |     |                     |             |             |             |             |
|                 |      |     |                     |             |             |             |             |
| LFAL-120-050-05 | 1161 | 469 | 547                 | 389         | 446         | 237         | 285         |
| LFAL-150-050-05 | 1441 | 496 | 672                 | 475         | 546         | 288         | 347         |
| LFAL-170-050-05 | 1681 | 469 | 778                 | 552         | 633         | 335         | 404         |
| LFAL-120-060-05 | 1161 | 596 | 628                 | 446         | 512         | 272         | 327         |
| LFAL-150-060-05 | 1681 | 596 | 772                 | 544         | 727         | 328         | 396         |
| LFAL-170-060-05 | 1441 | 596 | 894                 | 634         | 626         | 385         | 464         |

H = hauteur, L = longueur

75/65/20 = puissance thermique normalisée conformément à EN 442

## Détails du produit



Detail du raccordement latéral, robinetterie en option